


# IDENTIFICATION GUIDE FOR DRIVE SHAFTS



Size	Cross and bearing kit	Inboard yoke	Profile pairing	Guard tubes	Guard cones
<b>LINE W / LINE W...E</b>					
<b>W 2100</b> <b>W 100 E</b>			 00a* 00c 0a 0v 1	 SD05 SD15	 SD05 SD15
<b>W 2200</b> <b>W 200 E</b>			 00a* 00cH 0a 0v 1	 SD05 SD15	 SD05 SD15
<b>W 2300</b> <b>W 300 E</b>			 0v 1 1b 2a	 SD15 SD25 SD25/1	 SD15 SD25
<b>W 2400</b> <b>W 400 E</b>			 1b 2a S4LH S5	 SD25 SD25/1	 SD25
<b>W 2500</b>			 S4 S5	 SD25 SD25/1	 SD25
<b>W 2600</b>			 S4V S5 S5H S6	 SD25 SD35	 SD25 SD35
<b>W 2700</b>			 S2 x 47(25)H	 SD35	 SD35
<b>LINE W WITH WIDE ANGLE JOINT ON ONE SIDE <b>WWE</b> / ON TWO SIDES <b>WWZ</b></b>					
<b>WW 2280</b>			 00aGA** 00cGA 0aG 0vGA 1G	 SD05 SD15	 SD05/SD15 SDF15 SDF15
<b>WW 2380</b>			 0vGA 1G 1bGA 2aG	 SD15 SD25 SD25/1	 SD15/SD25 SDF15 SDF15 SDF25 SDF25/20
<b>WW 2480</b>			 1bGA 2aG S4LGA S5	 SD25 SD25/1	 SD25 SDF25/20 SDF25/20
<b>WW 2580</b>			 S4GA S5	 SD25 SD25/1	 SD25 SDF25/20 SDF25/20
<b>LINE P POWERDRIVE</b>					
<b>P 400</b>			 1bH 2a S4LH S5	 PG20	 PG20
<b>P 500</b>			 S4LH S5 S4V S5	 PG20	 PG20
<b>P 600</b>			 S5H S6	 PG30	 PG30
<b>P 700</b>			 S5H S6	 PG30	 PG30
<b>P 800</b>			 60 x 55 (28) H	 PG30V	 PG30V
<b>LINE P WITH WIDE ANGLE JOINT ON ONE SIDE <b>PWE</b> / ON TWO SIDES <b>PWZ</b></b>					
<b>PW 480</b>			 1bGA 2aG S4LGA S5	 PG20	 SDF25/20 SDF25/20
<b>PW 580</b>			 S4GA S5	 PG20	 SDF25/20 SDF25/20
<b>PW 675</b>			 S4GA S5 S5H S6H	 PG20 PG30	 SDF25/20 SDF25/20

\* Profile 00a replaced by profile 00c \*\* Profile 00aGA replaced by profile 00cGA Profile tube: H = Hardened, V = heat-treated




# IDENTIFICATION GUIDE FOR DRIVE SHAFTS



Size	Cross and bearing kit	Yoke	Replaced by size	Profile pairing	*Guard tubes	*guard cones
IDENTIFICATION GUIDE FOR TYPES PHASED OUT (Individual components only conditional available)						
W I			W 2300			
W II			W 2400			
W 220			W 2400			
WWE/WWZ 2270			WWE/WWZ 2280			
WWE/WWZ 2370			WWE/WWZ 2380			
WWE/WWZ 220			WWE/WWZ 2480			

\*SC 04/14/24/34 interchangeable with SC/SD 05/15/25/35 \*\* Profile 00aGA replaced by profile 00CGA

## CONNECTING PROFILES

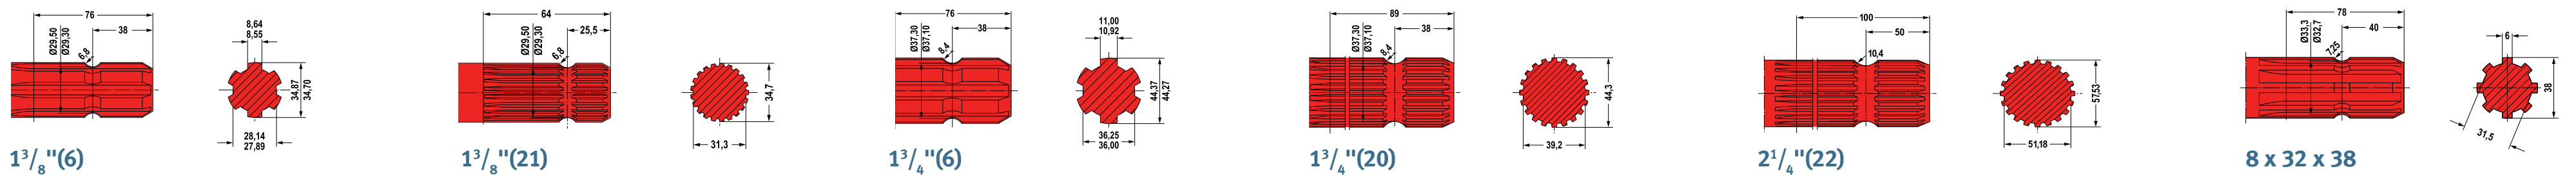

## DIMENSIONS FOR GUARD TYPE

	SC SD		SC/SD05 D = 47	SC/SD15 D = 58	SC/SD25 D = 70	SC/SD35 D = 90
	PG				PG25 D = 70	
	PG		PG20 D = 85		PG30 D = 104	

FOR ALL REPAIRS  
USE ONLY ORIGINAL  
WALTERSCHEID SPARES.



Walterscheid  
the original